


Expert Diagnosis - Data Analysis

This function allows various types of control modules mounted on the vehicle to confirm the parameter values, which control the sensor's signal input and movement of actuators, through vehicle communication.

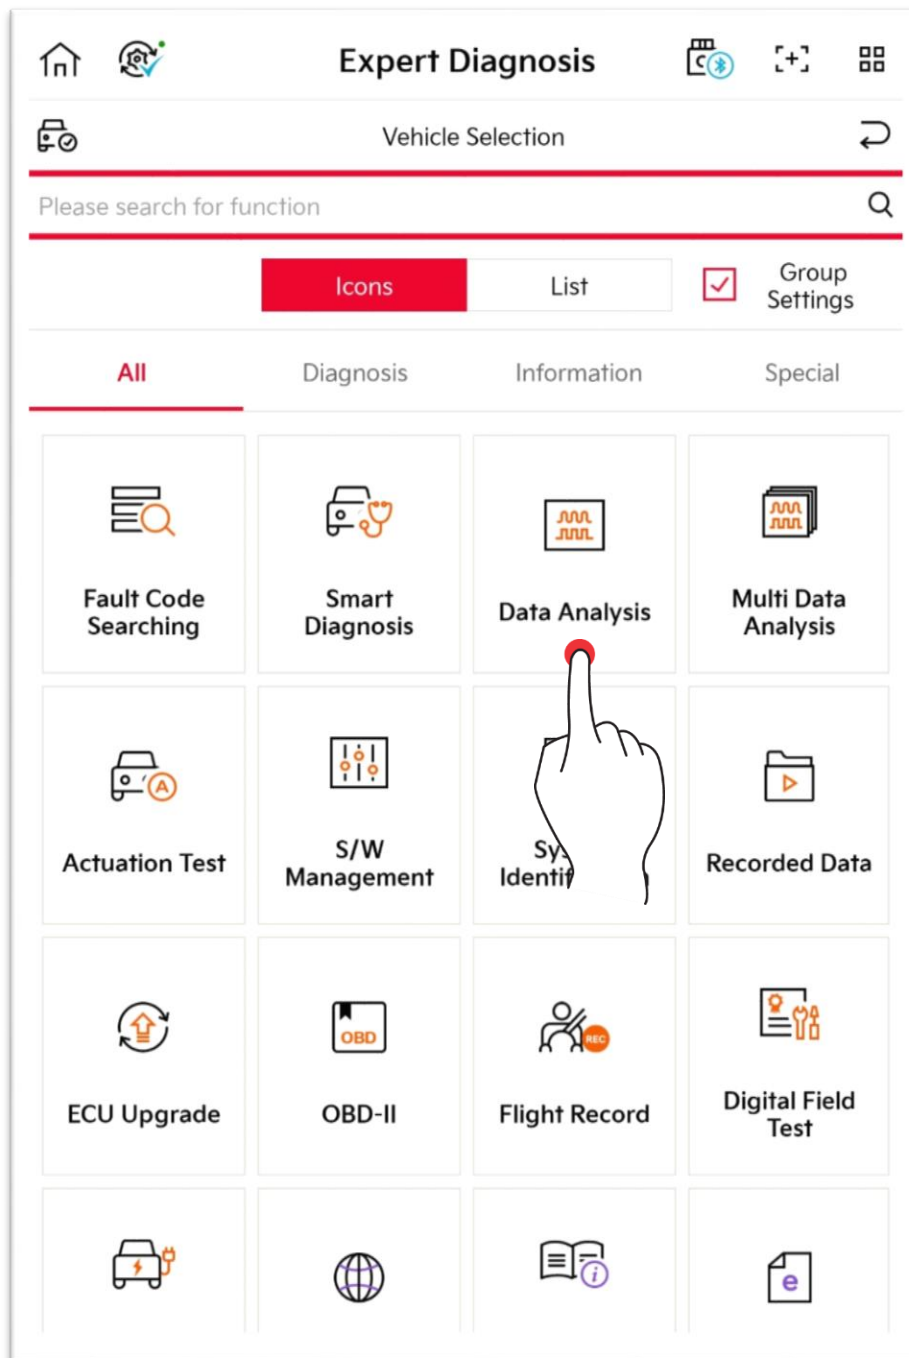


Mode

This is a description of sensor data indicating mode.

Text Mode

This indicates the sensor data in text format.

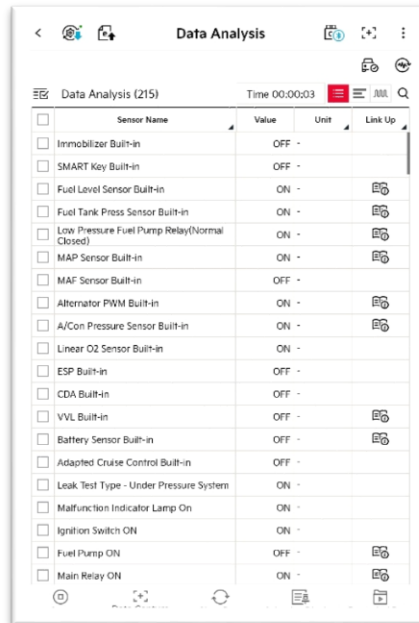


Data Analysis (215) Time 00:00:03

<input type="checkbox"/>	Sensor Name	Value	Unit	Link Up
<input type="checkbox"/>	Immobilizer Built-in	OFF	-	
<input type="checkbox"/>	SMART Key Built-in	OFF	-	
<input type="checkbox"/>	Fuel Level Sensor Built-in	ON	-	
<input type="checkbox"/>	Fuel Tank Press Sensor Built-in	ON	-	
<input type="checkbox"/>	Low Pressure Fuel Pump Relay(Normal Closed)	ON	-	
<input type="checkbox"/>	MAP Sensor Built-in	ON	-	
<input type="checkbox"/>	MAF Sensor Built-in	OFF	-	
<input type="checkbox"/>	Alternator PWM Built-in	ON	-	
<input type="checkbox"/>	A/Con Pressure Sensor Built-in	ON	-	
<input type="checkbox"/>	Linear O2 Sensor Built-in	ON	-	
<input type="checkbox"/>	ESP Built-in	OFF	-	
<input type="checkbox"/>	CDA Built-in	OFF	-	
<input type="checkbox"/>	VVL Built-in	OFF	-	
<input type="checkbox"/>	Battery Sensor Built-in	OFF	-	
<input type="checkbox"/>	Adapted Cruise Control Built-in	OFF	-	
<input type="checkbox"/>	Leak Test Type - Under Pressure System	ON	-	
<input type="checkbox"/>	Malfunction Indicator Lamp On	ON	-	
<input type="checkbox"/>	Ignition Switch ON	ON	-	
<input type="checkbox"/>	Fuel Pump ON	OFF	-	
<input type="checkbox"/>	Main Relay ON	ON	-	

Bar Graph Mode

This indicates the sensor data in bar graph format.

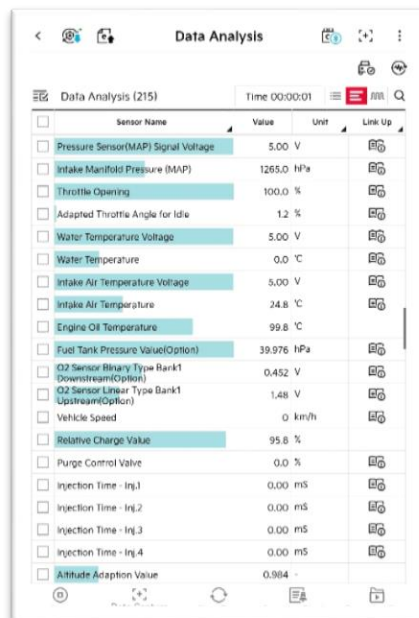


Data Analysis (215) Time 00:00:01

<input type="checkbox"/>	Sensor Name	Value	Unit	Link Up
<input type="checkbox"/>	Pressure Sensor(MAP) Signal Voltage	5.00	V	
<input type="checkbox"/>	Intake Manifold Pressure (MAP)	1255.0	hPa	
<input type="checkbox"/>	Throttle Opening	100.0	%	
<input type="checkbox"/>	Adapted Throttle Angle for Idle	1.2	%	
<input type="checkbox"/>	Water Temperature Voltage	5.00	V	
<input type="checkbox"/>	Water Temperature	0.0	°C	
<input type="checkbox"/>	Intake Air Temperature Voltage	5.00	V	
<input type="checkbox"/>	Intake Air Temperature	24.8	°C	
<input type="checkbox"/>	Engine Oil Temperature	99.8	°C	
<input type="checkbox"/>	Fuel Tank Pressure Value(Optional)	39.976	hPa	
<input type="checkbox"/>	O2 Sensor Binary Type Bank1 (Downstream(Optional))	0.452	V	
<input type="checkbox"/>	O2 Sensor Linear Type Bank1 (Upstream(Optional))	1.48	V	
<input type="checkbox"/>	Vehicle Speed	0	km/h	
<input type="checkbox"/>	Relative Charge Value	95.8	%	
<input type="checkbox"/>	Purge Control Valve	0.0	%	
<input type="checkbox"/>	Injection Time - Inj.1	0.00	mS	
<input type="checkbox"/>	Injection Time - Inj.2	0.00	mS	
<input type="checkbox"/>	Injection Time - Inj.3	0.00	mS	
<input type="checkbox"/>	Injection Time - Inj.4	0.00	mS	
<input type="checkbox"/>	Altitude Adaption Value	0.984	-	

Graph Mode


This indicates selected sensor data in graph format.

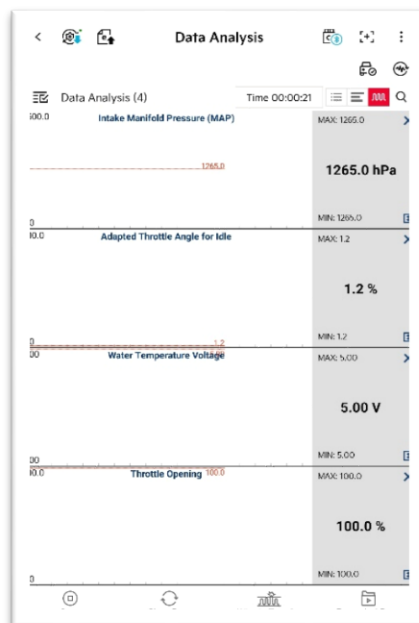


Graph Mode - Function Buttons

Wiggle Test On / Off

When Wiggle Test function is switched ON, the user can configure a desired data maximum/minimum value, and receive a notification if the sensor value exceeds or falls below the standard value.

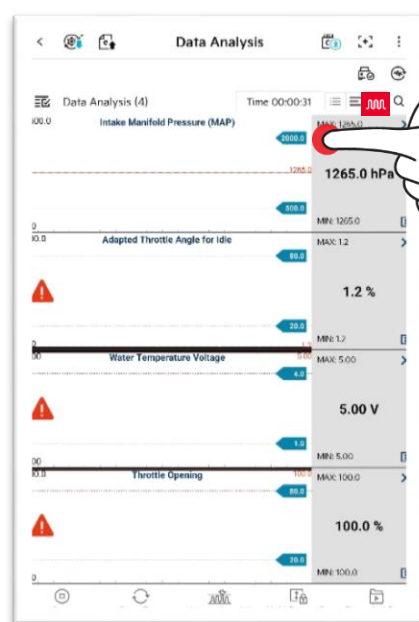


Configure the value by dragging the cursor.


 If it is set as muted or low volume, the alarm sound may not be heard.


Wiggle Test On - Hole Range On

If Hold Range is switched ON, it only shows the sensor values that exceed or fall below the standard value.

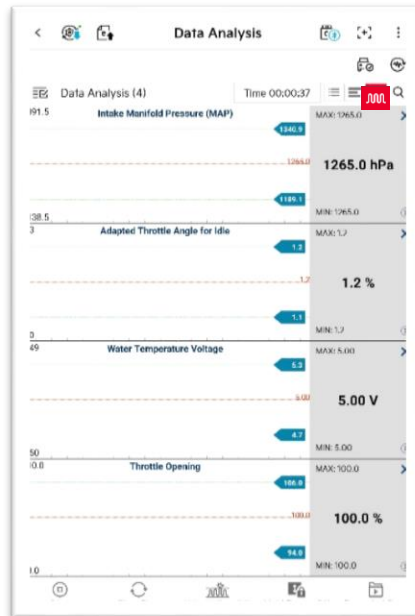


Group/User Group

Through  button on the top-left corner, the user can use Group/User Group function.

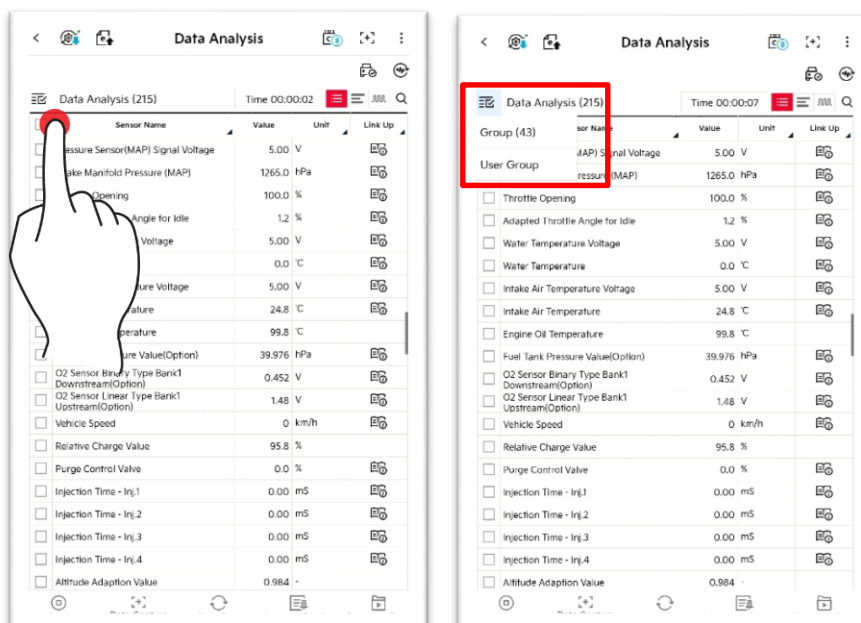

Group


It forms a group of sensor data items to express only relevant data.

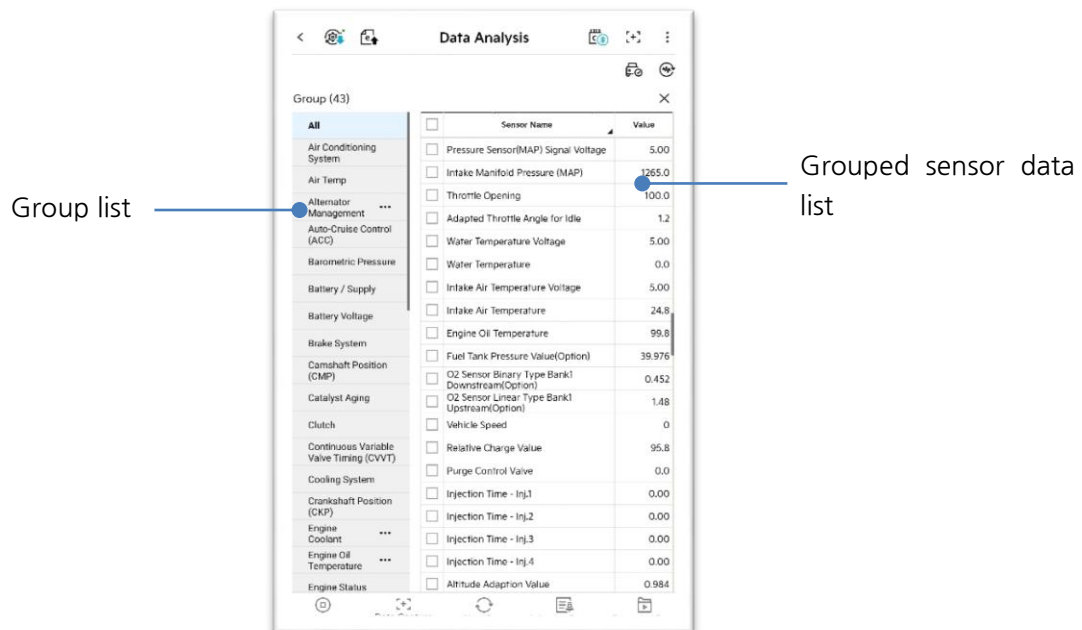


User Group

The user can form or edit groups of desired sensor data items.


1. In User Group screen, select the sensor data items to be grouped.

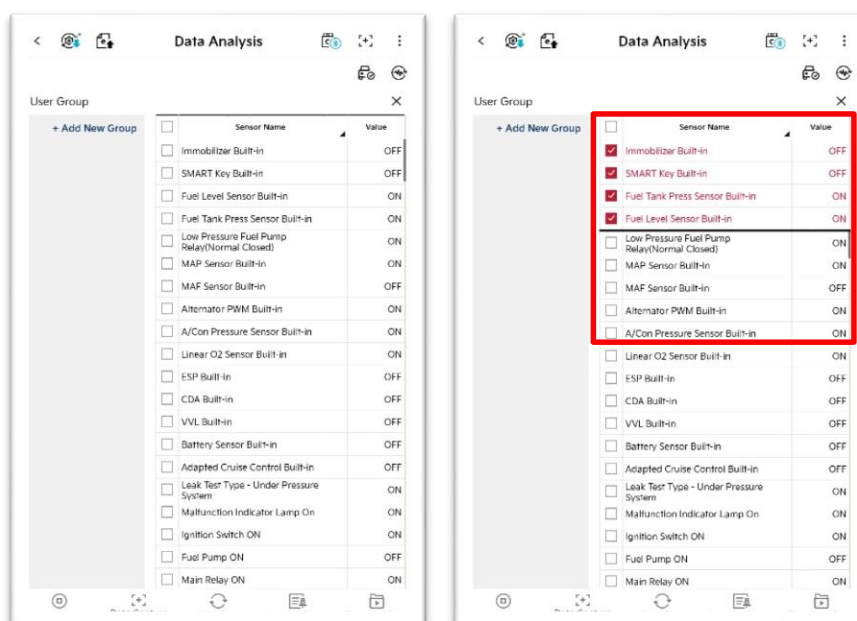

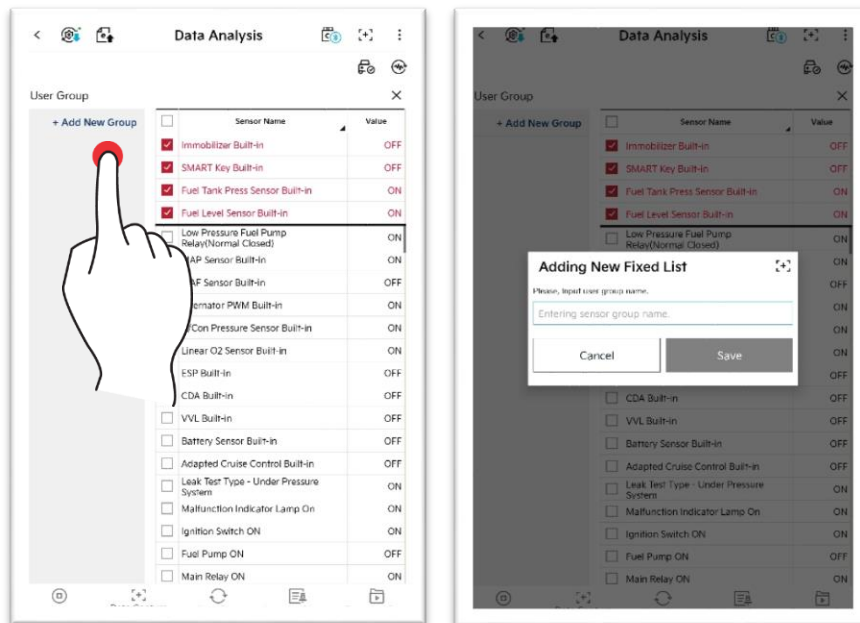


2. Once selection of items is made, form a group through ‘Add a New Group’.

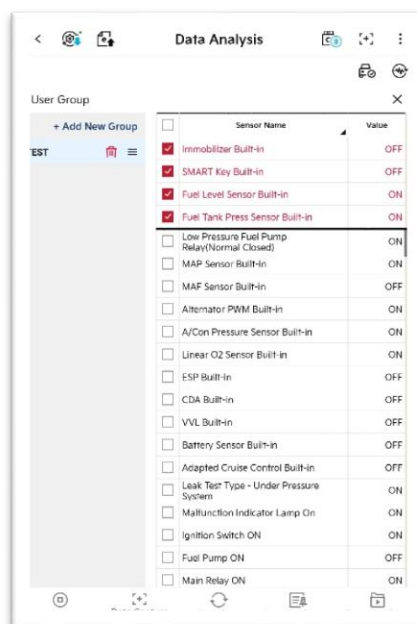


3. The group formation is completed.




		You can delete the formed group.
		You can change the group order.


Search

You can search the sensor data by entering a search word and touching .

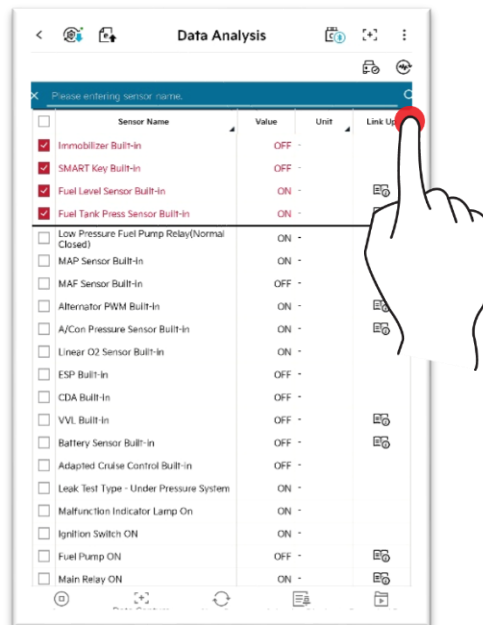

Link-up


You can check the sensor information of the selected items by touching .

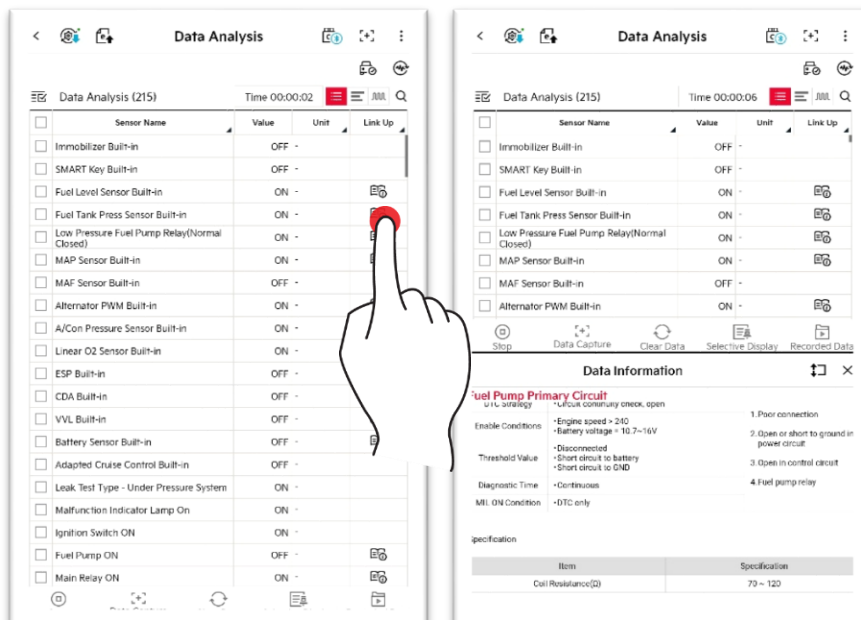






Arrangement and Unit Change

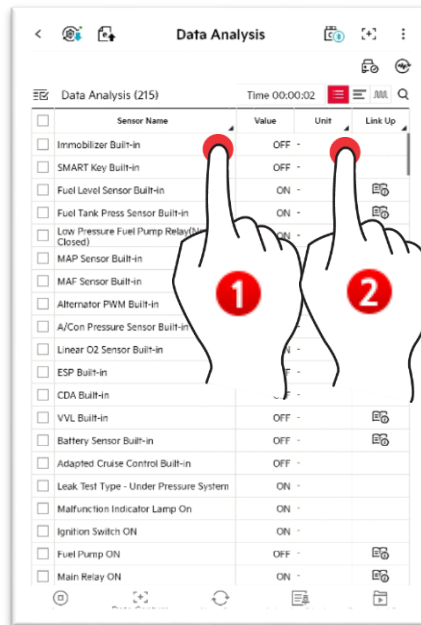You can arrange the items by touching the sensor name, and change the unit by touching unit.


Touch  located at the bottom right corner of each title.




Bottom Function Buttons

 Stop	This function collects sensor data values over a certain period of time, and stops the sensor data values. 'Start' and 'Stop' buttons operate in turn.
 Data Capture	This captures the sensor data screen.
 Clear Data	This initializes the collected sensor data values, and recollects them.
 Selective Display	This only shows the sensor values of the sensor data items, which were selected based on needs. The entire sensor data values are shown when Fixed Output function is turned off.
 Recorded Data	This function analyzes the saved sensor data file. This is linked to Saved Data Analysis function.

Screen Control

1. You can spread or fold the screen by dragging  button upwards or downwards.

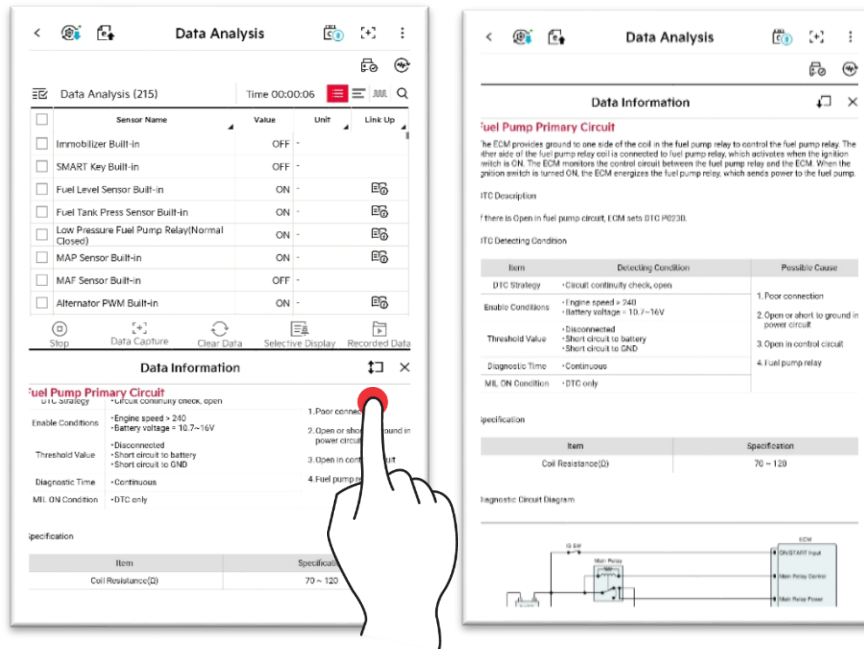

2. You can maximize/minimize the items in Graph Mode.

