


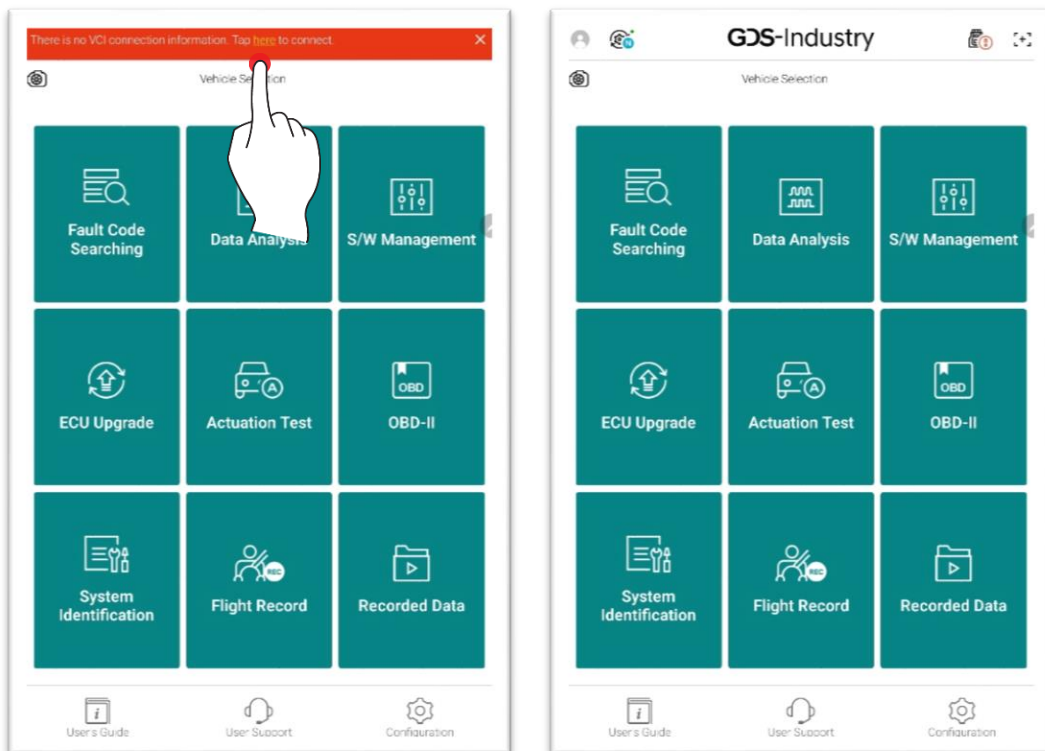
# Module Connection

## Entering Device Manager (common)

### Entering via Top Menu

Through the icon at the bottom of GDS Industry, you can enter the Device Manager function.


Touch 'Here' or  icon.



## Entering via Bottom Menu

Through the Environment Setting at the bottom of GDS Industry, you can enter the Device Manager function.

Please enter the Environment Setting/Device Manager function at the bottom of screen.

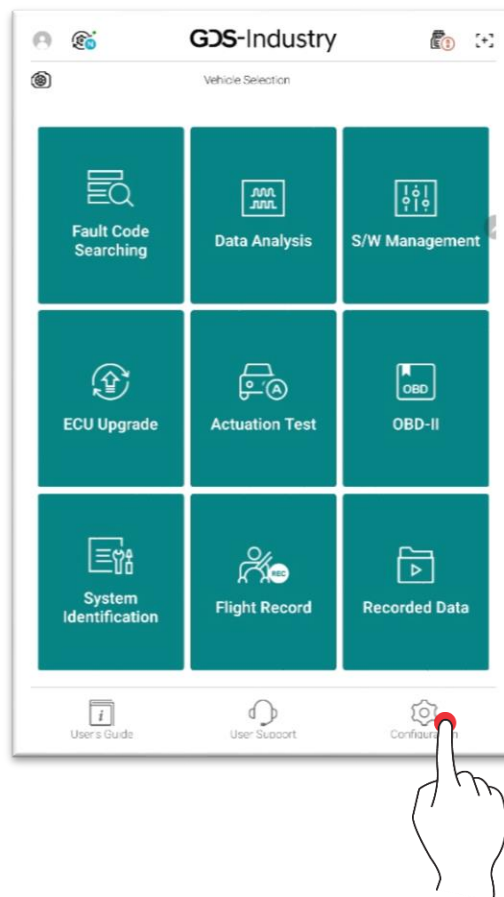


## Connecting VCI III

### Connecting via Wireless Communication (Wi-Fi direct, B/T)


Connect VCI III Module to the vehicle's OBD-II Connector to support power, and proceed the following process:




## 1. Touch VCI III tab of the Device Manager.

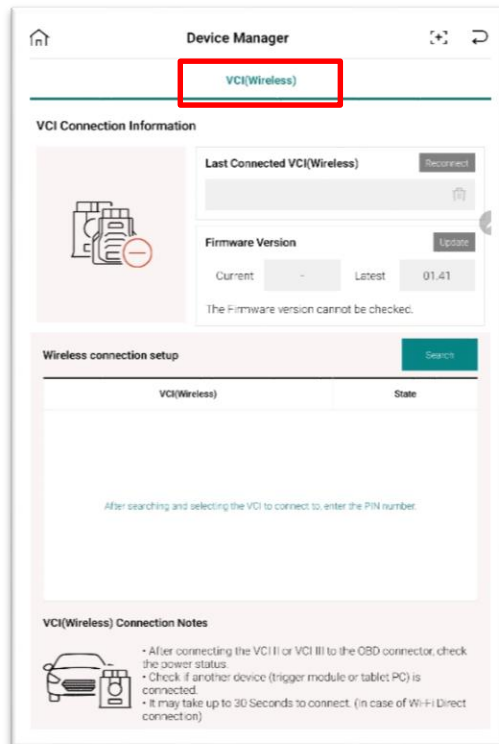


## 2. Search VCI III to connect through icon.

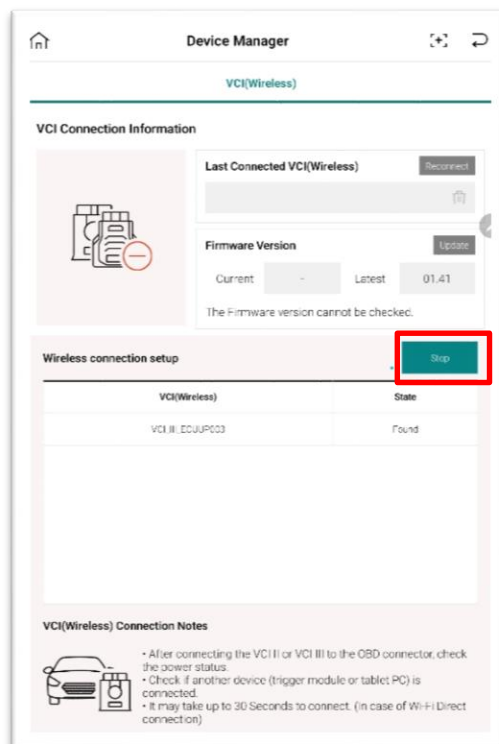

3. Check the serial number of VCI III to connect, and select it.

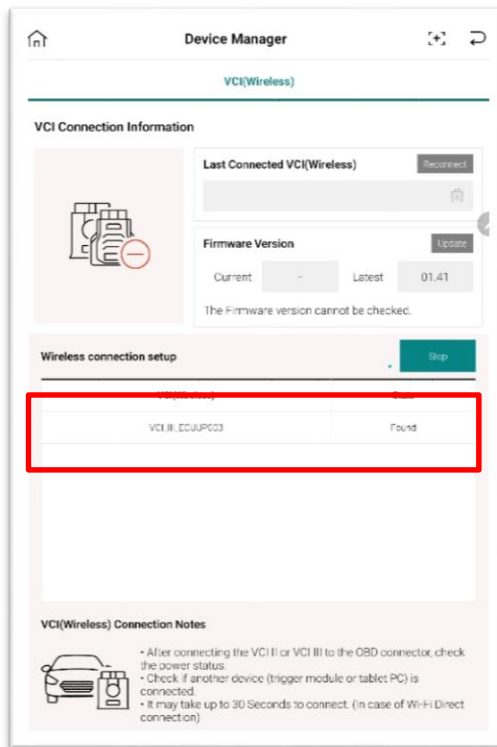




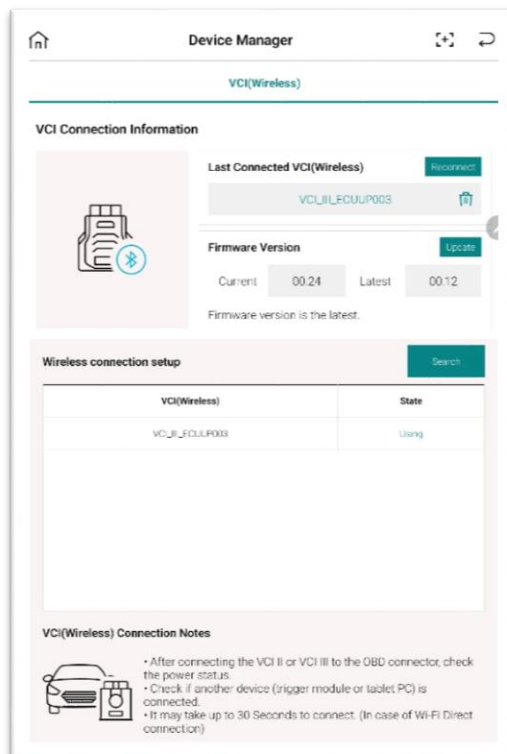

4. VCI III connection is completed.





## Tip on Status based on VCI III Lighting Color

	Not connected to tablet although VCI III's power is ON. (proceed connection through VCI III Connection Guide)
	VCI III and tablet is connected normally.
	VCI III and tablet are disconnected. (Connect VCI III to OBD-II Connector again, and reattempt connection with tablet.)
	VCI III is performing ECU upgrade.
	VCI III is in Driving Data Saving Mode.