

VCI 3 Firmware reset User Guide

GIT

1. How to install VCI3 Firmware reset App
2. How to reset VCI3 Firmware by using the App
3. How to perform VCI 3 Firmware update.

1. How to install VCI 3 Firmware reset App

1. How to install VCI 3 Firmware reset App

Before you install

1. This app is to reset VCI 3 firmware.
2. Install this app only on **Android mobile device**.
OS : Android 11-14
Tablet Model: Tab S5e, Tab S6, Tab S7, Tab S7Fe,
Tab Active 4 pro

1. Scan the QR code with your mobile device.




2. Tap the link.




1. How to install VCI 3 Firmware reset App

3. Tab "Download" as below.

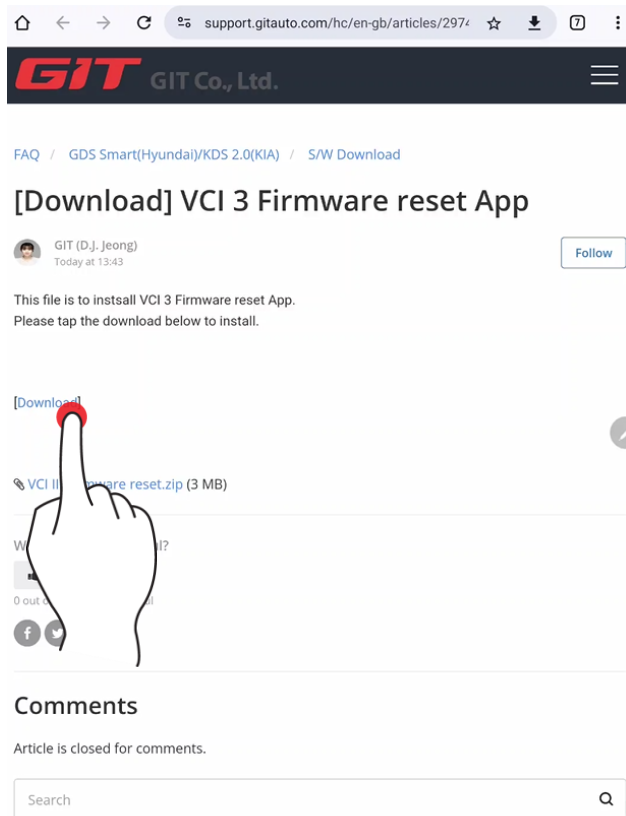

The screenshot shows a web browser at support.gitauto.com. The article title is "[Download] VCI 3 Firmware reset App" by GIT (D.J. Jeong). Below the title, there is a "Follow" button. The main text says "This file is to install VCI 3 Firmware reset App. Please tap the download below to install." A blue "[Download]" link is visible. Below the link, a hand icon is pointing to the link. The file name "VCI III Firmware reset.zip (3 MB)" is shown. At the bottom, there is a "Comments" section with the message "Article is closed for comments." and a search bar.


4. Download the file.

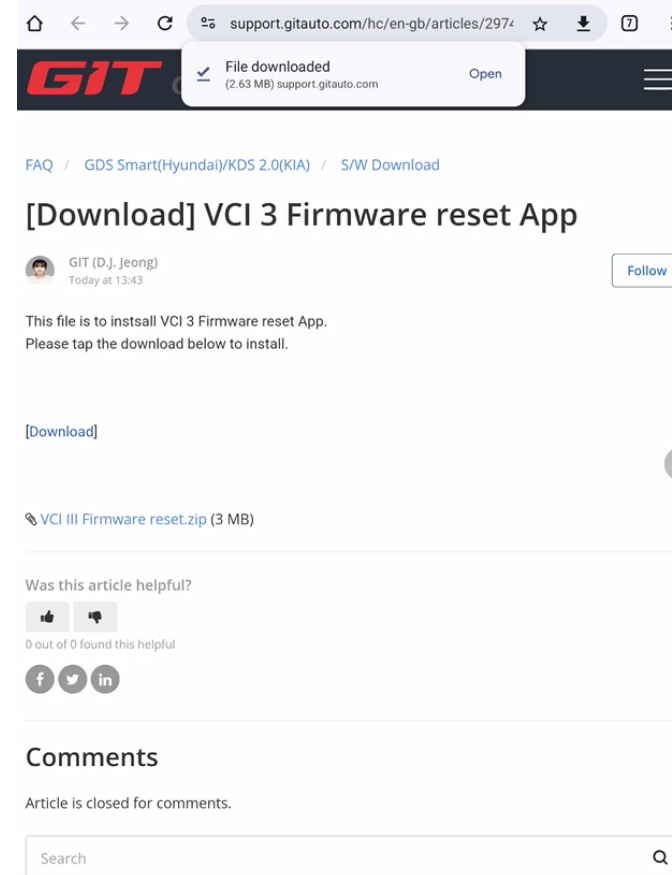

The screenshot shows the same support page as in step 3, but with a download notification bar at the top. The notification bar says "File downloaded (2.63 MB) support.gitauto.com" and has an "Open" button. The rest of the page content is identical to the previous screenshot.


1. How to install VCI 3 Firmware reset App

5. Open the downloaded file.

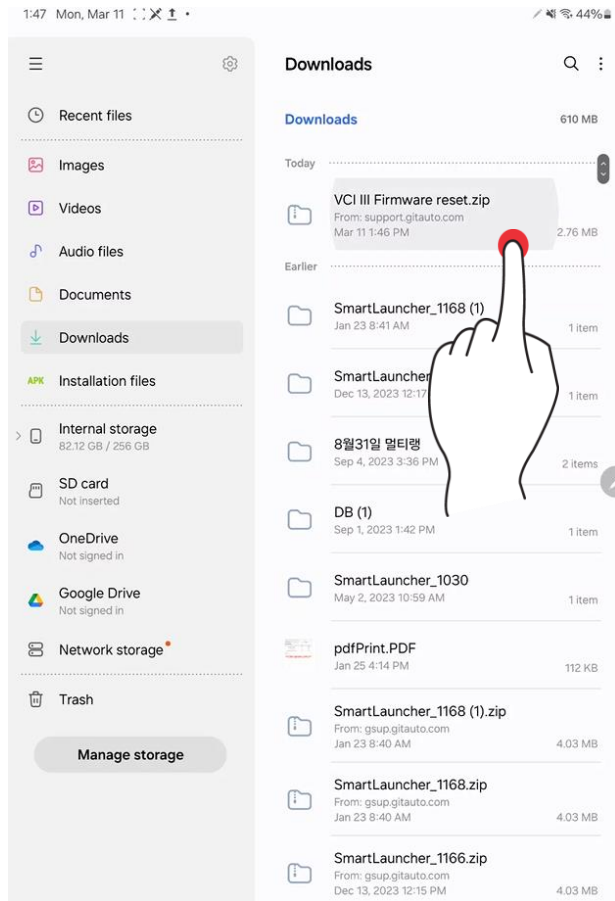


- You can find the downloaded file on the path below.
[My file > Internal storage > download]

6. Unzip the file.

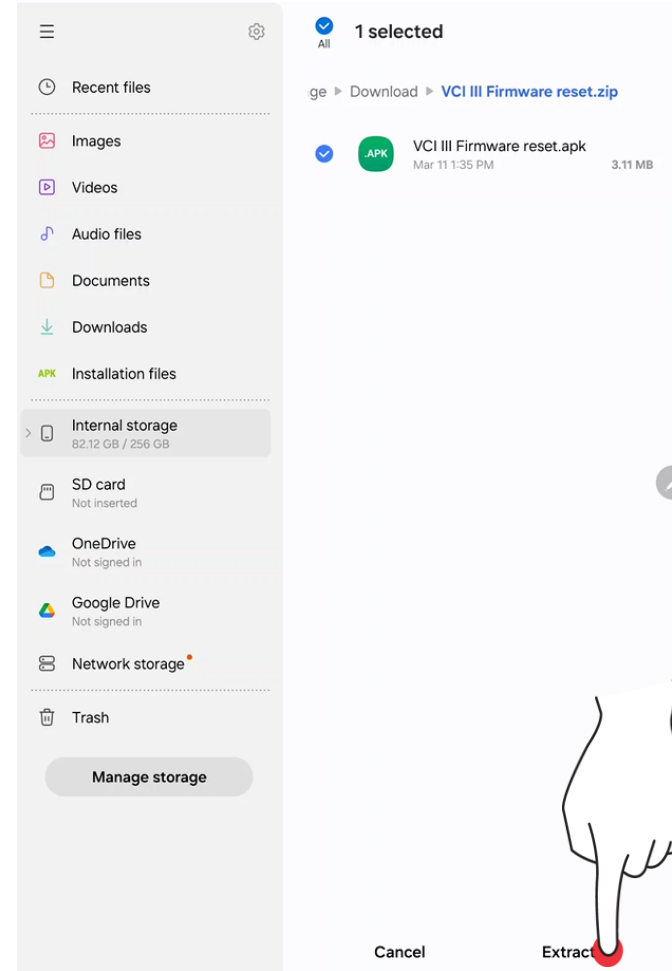


1. How to install VCI 3 Firmware reset App

7. Tap apk file.

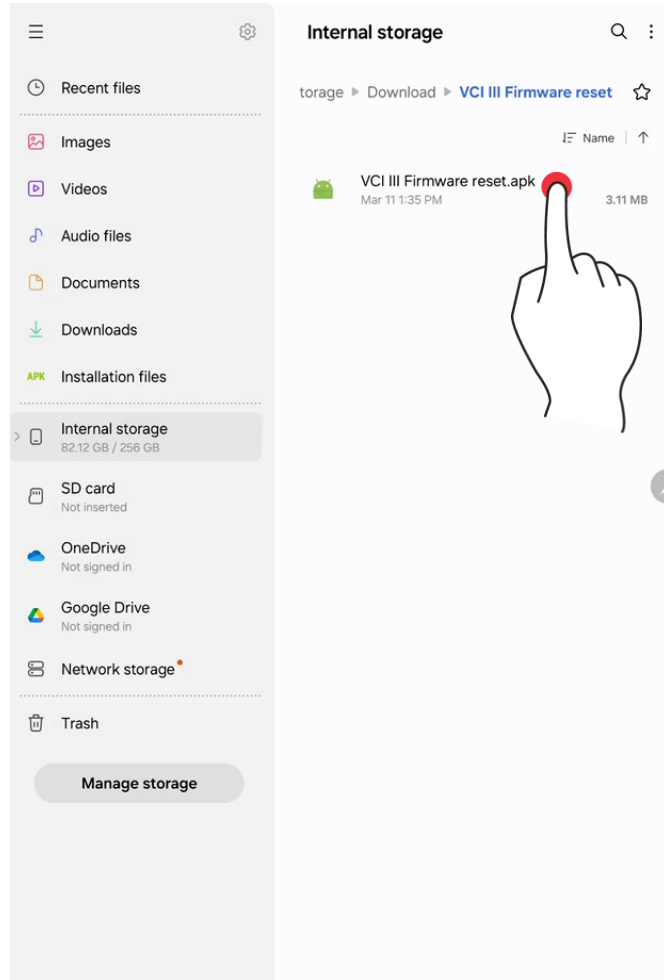


8. Tab "Install" to Install.

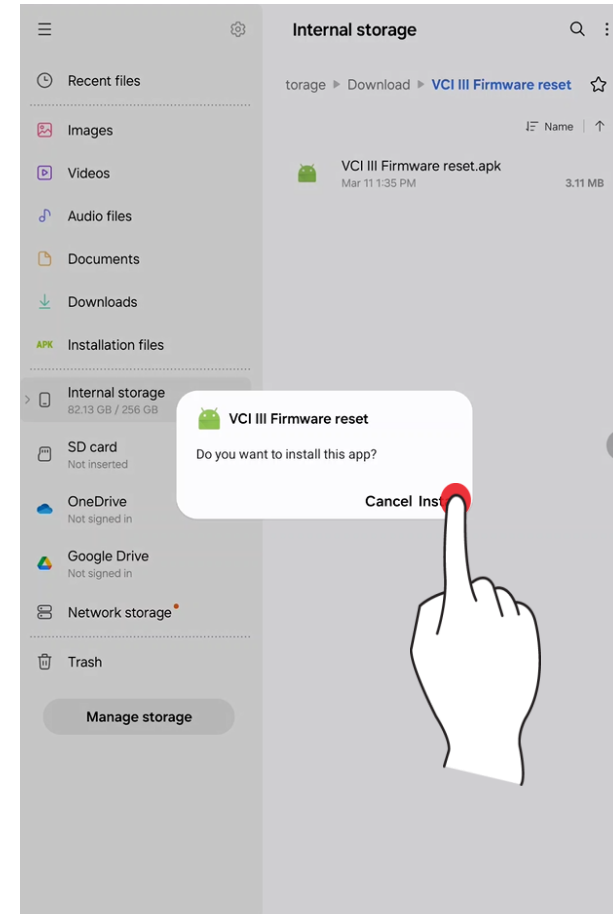


1. How to install VCI 3 Firmware reset App

9. Tab "Install anyway".

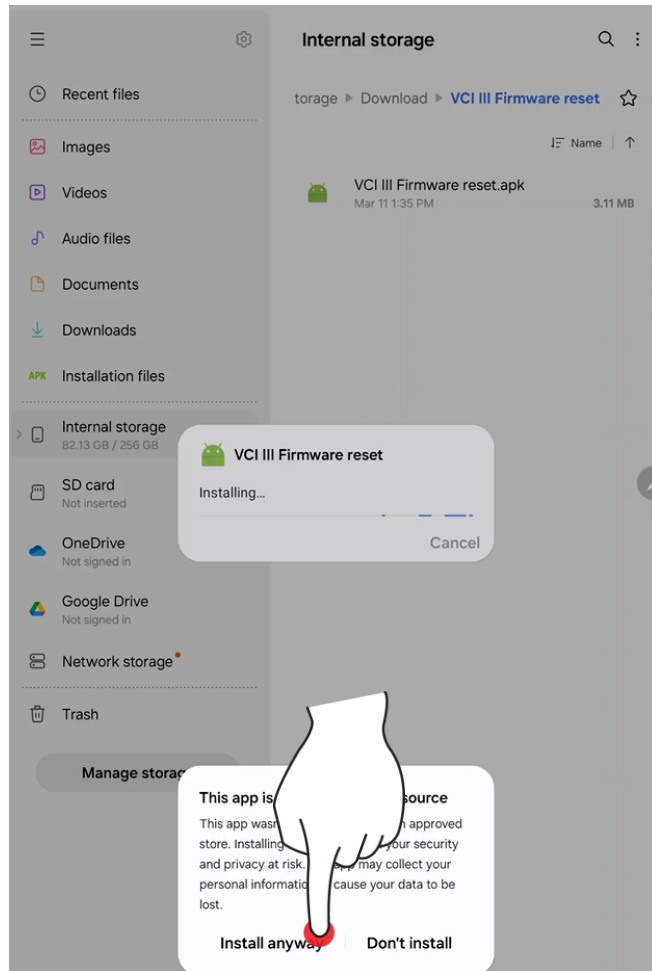


10. Tab "Open".

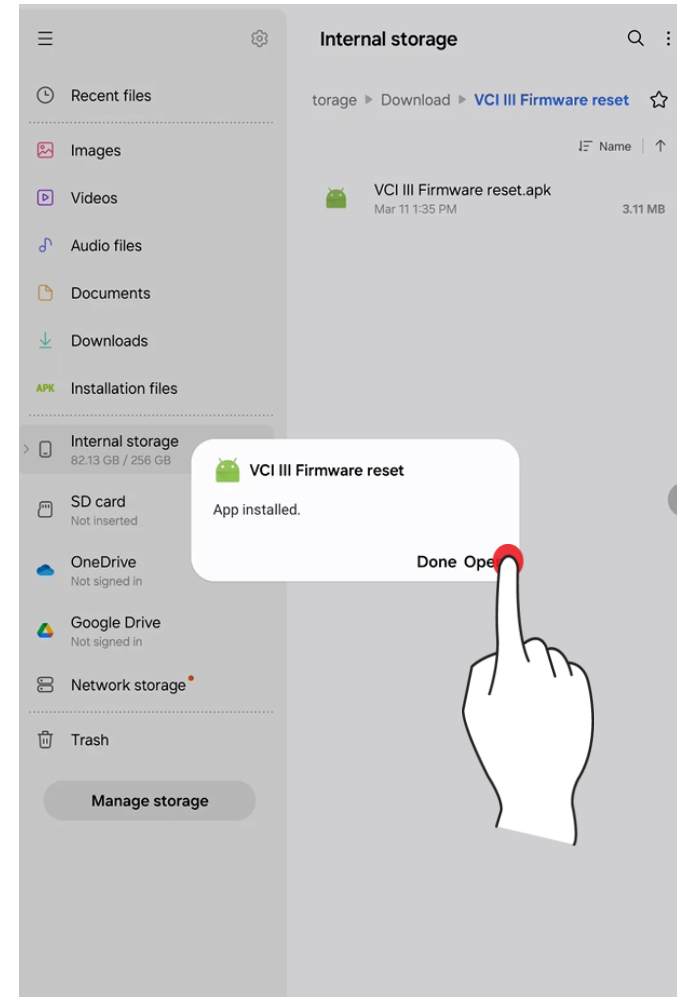


1. How to install VCI 3 Firmware reset App

11. Tab "OK".

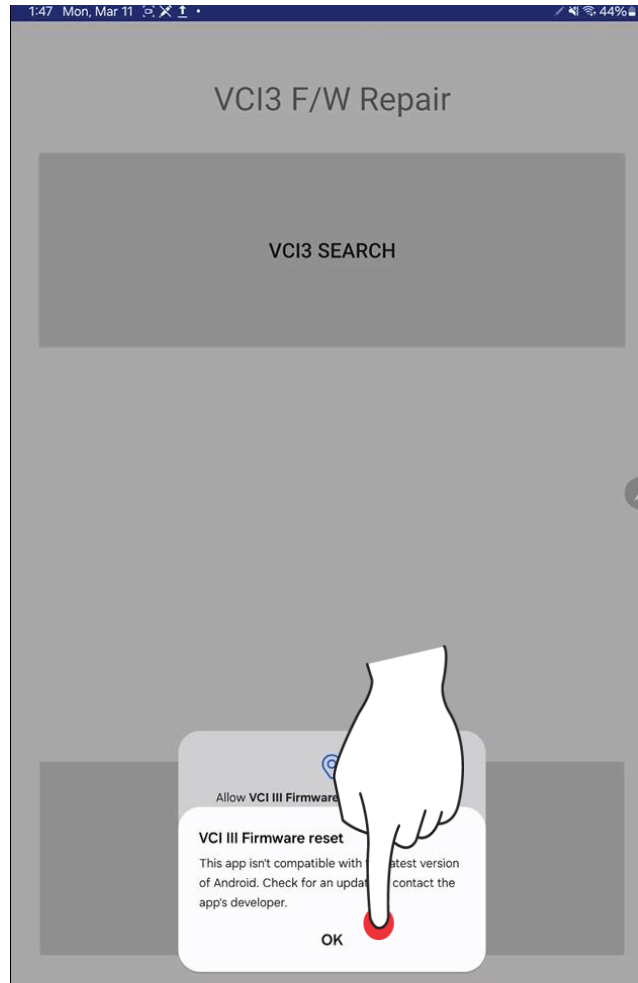


12. Tab "While using the app".

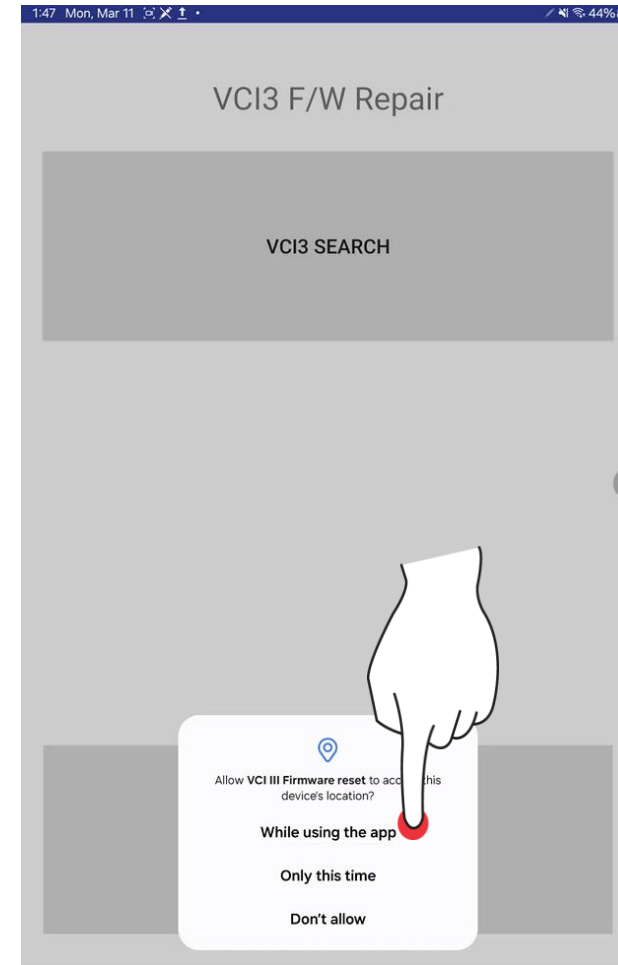


1. How to install VCI 3 Firmware reset App

13. Tab "Allow".

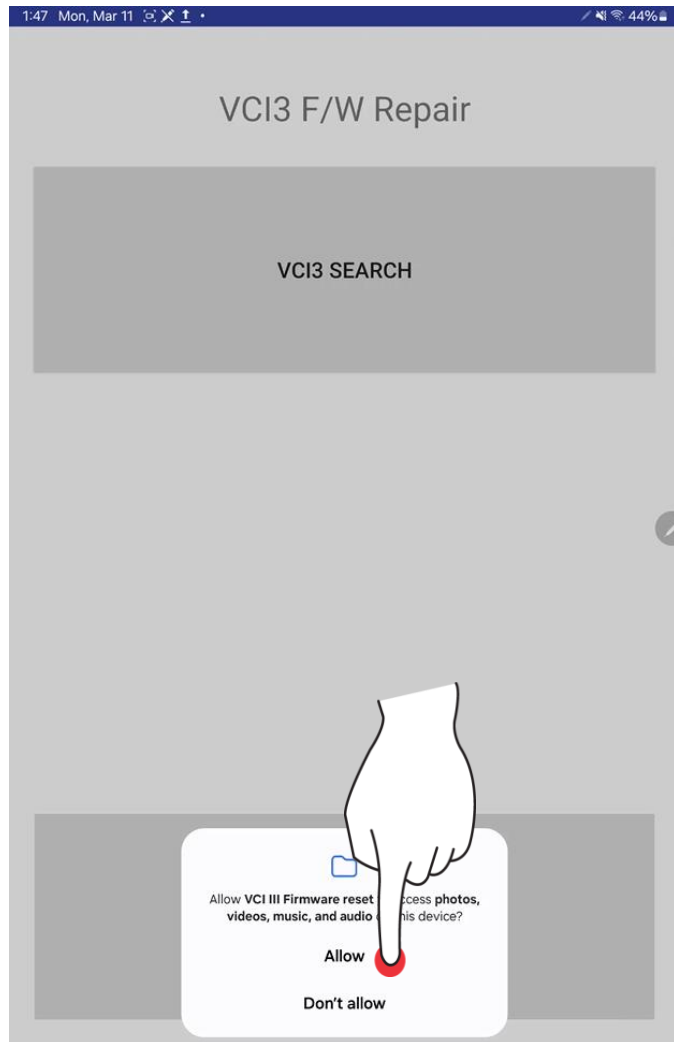

14. Installation is complete.

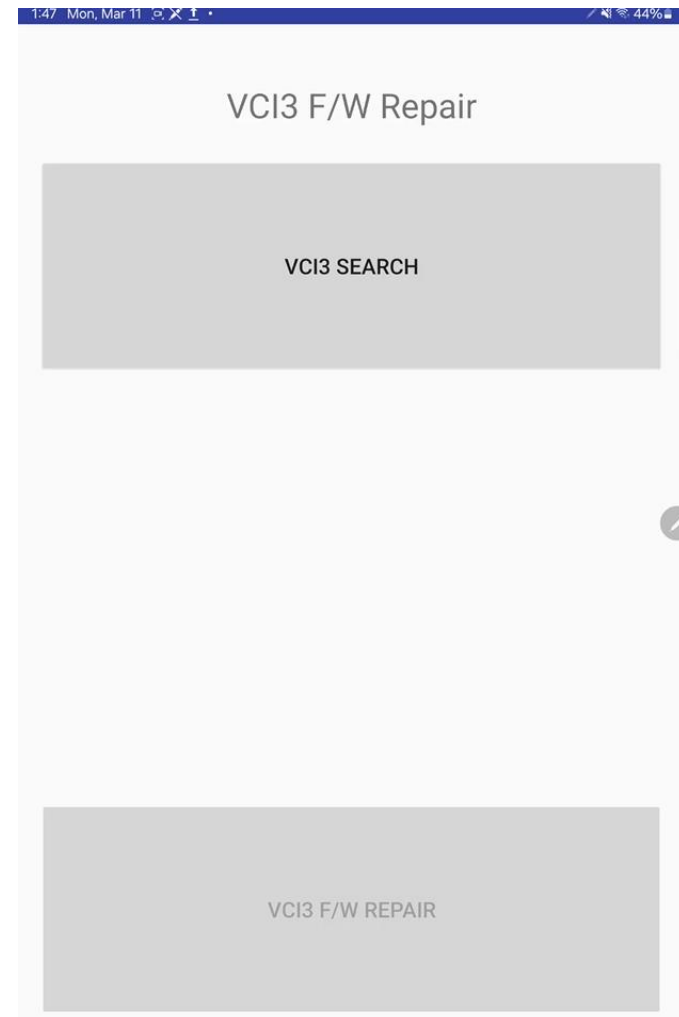

2. How to reset VCI 3 Firmware

2. How to reset VCI 3 Firmware


Before you install

DO NOT close the app or perform any other tasks while resetting.

1. Connect VCI 3 to the OBD connector on vehicle




2. Run "VCI 3 Firmware reset" app.

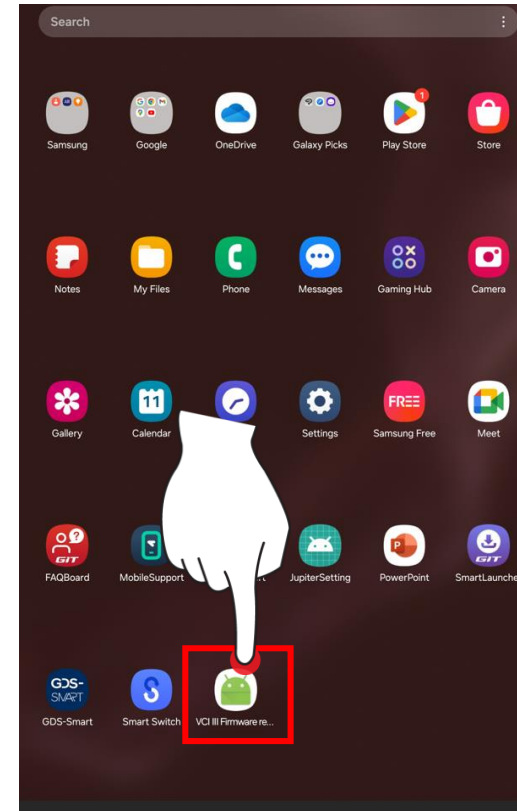


2. How to reset VCI 3 Firmware

3. Tap "VCI 3 Search".

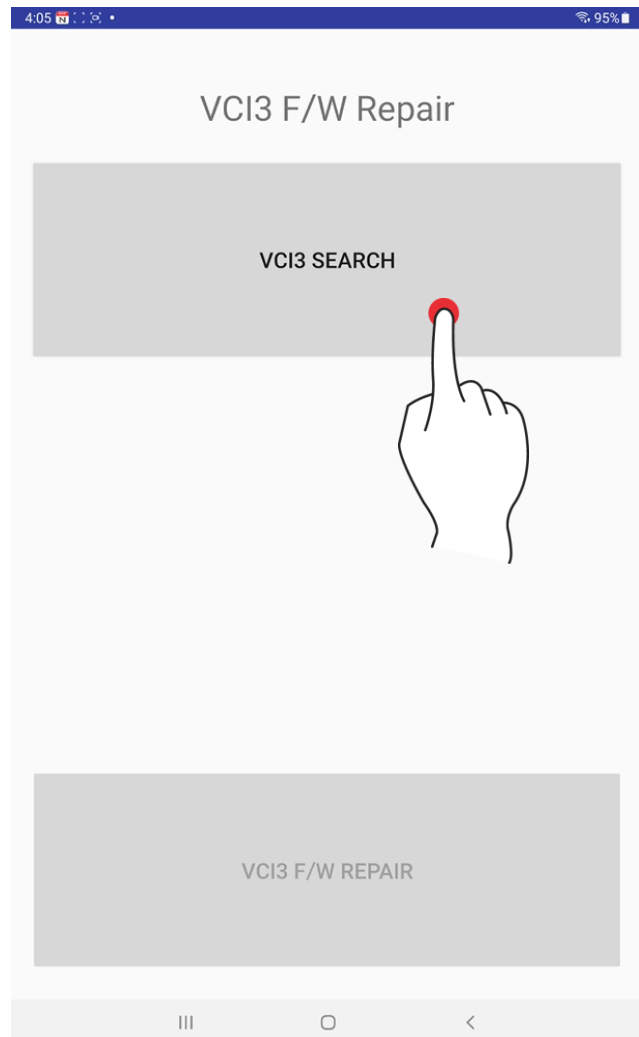


4. Wait for a while.

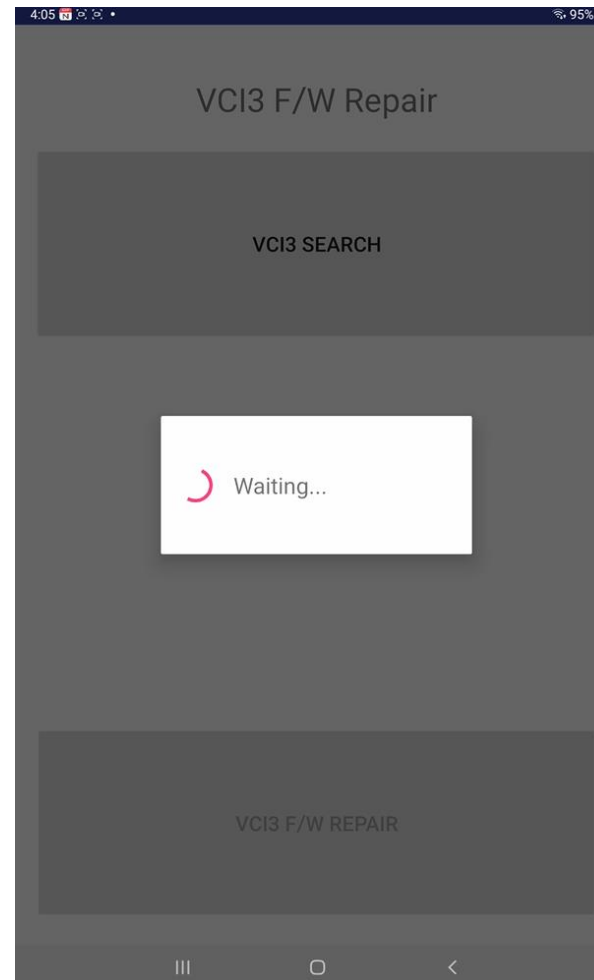


2. How to reset VCI 3 Firmware

5. You can find the serial No. of VCI 2 modules. Tab the serial no. that you want to reset.

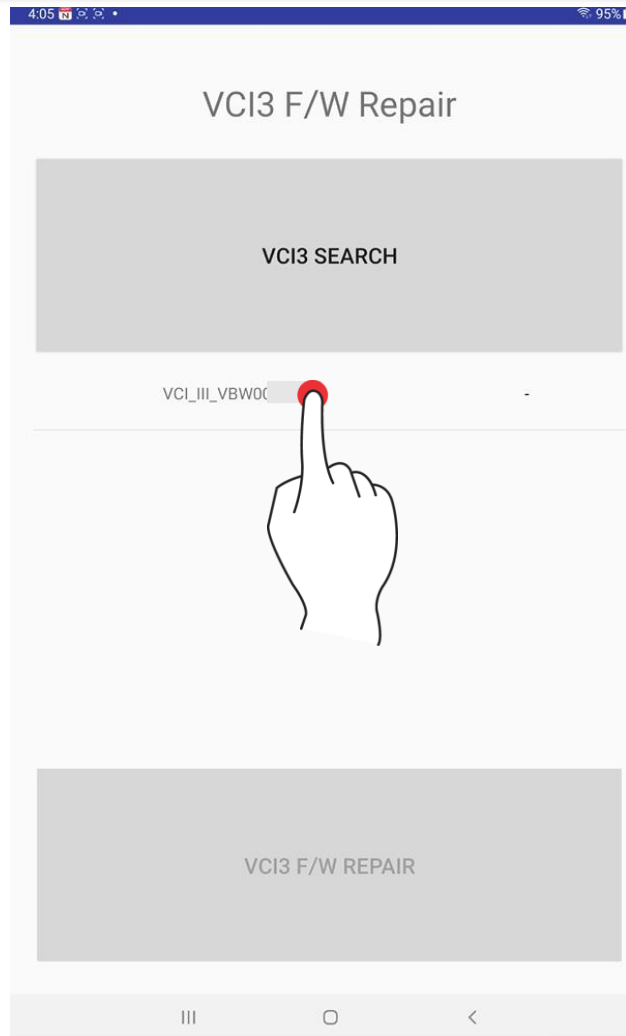


6. VCI 3 is connected to the App by B/T. To reset the firmware, tab "VCI3 F/W repair".

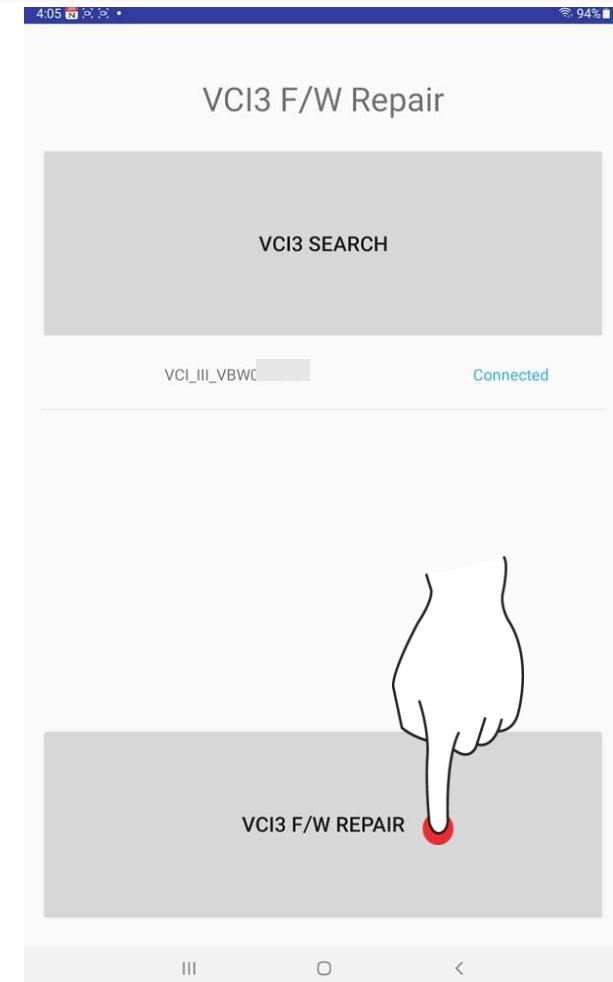


2. How to reset VCI 3 Firmware

7. The firmware update will take approximately 1 minute.

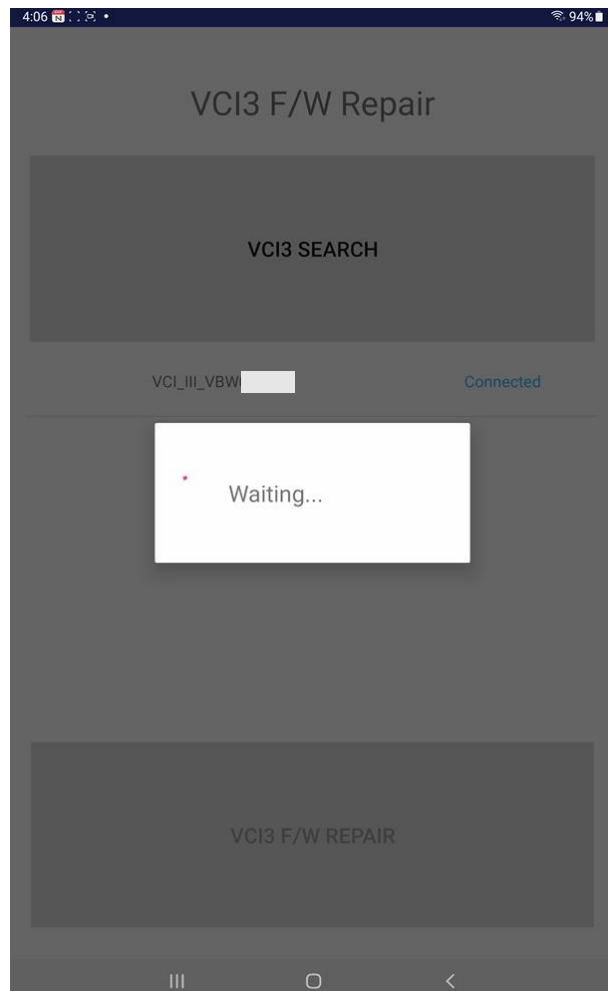


Notice.
If you have this message below, you must tap "Pair".

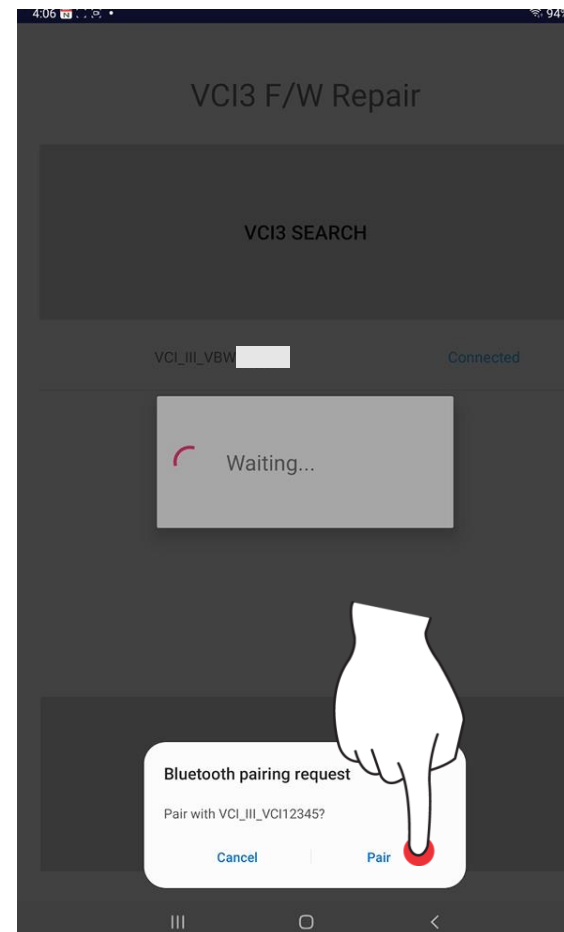

2. How to reset VCI 3 Firmware

8. Tab "OK" to complete. Wait for App shutdown


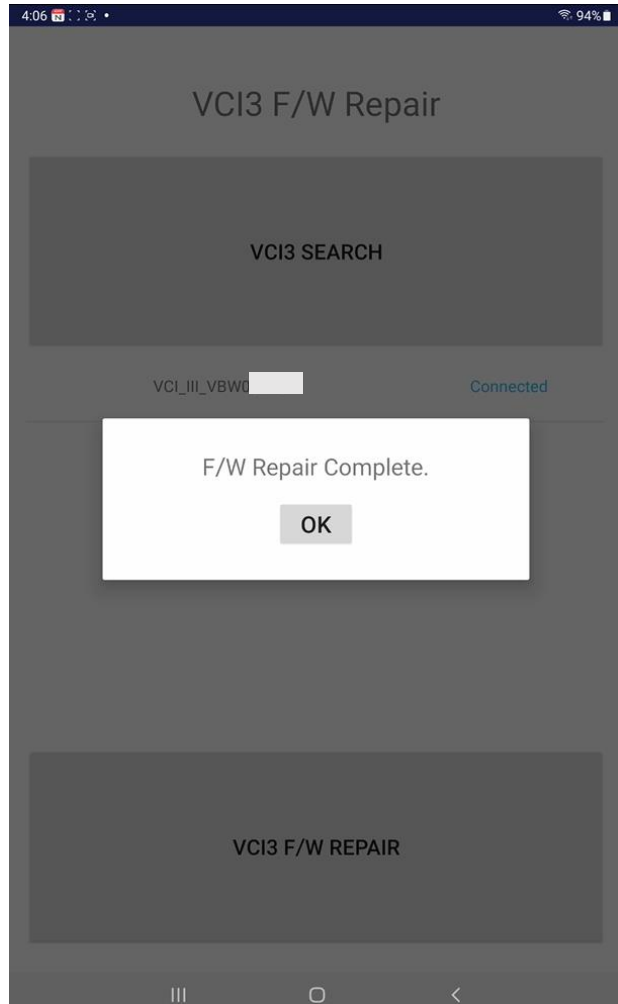


Notice.
Wait the VCI 3 module turn off and on it(LED: white)
again.


3. How to perform VCI 3 Firmware update

3. How to perform VCI 3 Firmware update

1. Run GDS Smart/KDS2.0.



2. Go to [Configuration-Device Manager].

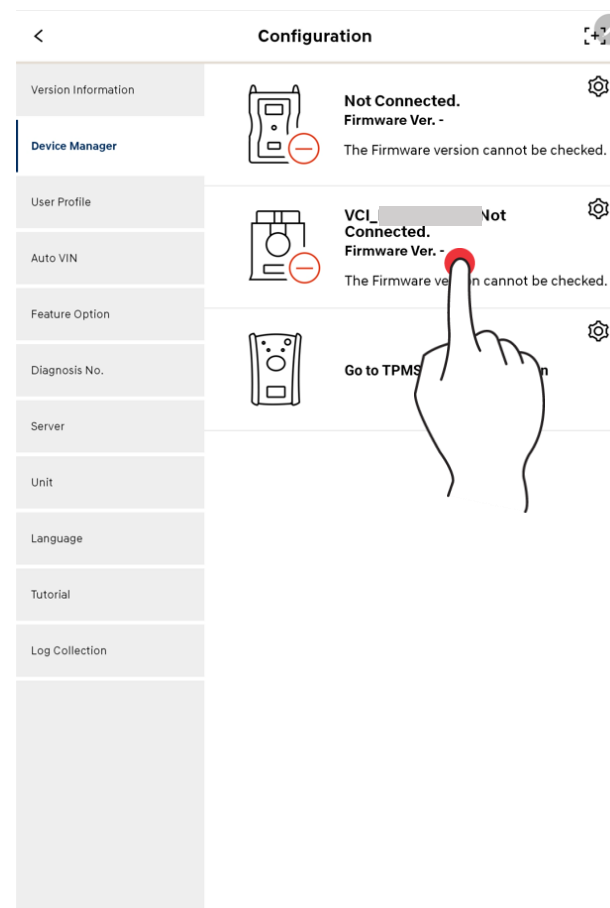

3. How to perform VCI 3 Firmware update

3. Tab "Search".

The screenshot shows the 'Device Manager' app interface. At the top, there are navigation tabs for 'VCI(Wireless)', 'GDS VCI', and 'TPMS'. Below this is the 'VCI Connection Information' section, which includes a 'Last Connected VCI(Wireless)' field with a 'Reconnect' button and a 'Firmware Version' section with 'Current' and 'Latest' fields and an 'Update' button. The text 'The Firmware version cannot be checked.' is displayed below the version fields. The main section is 'Wireless connection setup', which features a table with two columns: 'VCI(Wireless)' and 'State'. A blue 'Search' button is located at the top right of this section. A hand icon is shown tapping the 'Search' button. Below the table, there is a text instruction: 'After searching and selecting the VCI to connect to, enter the PIN number.'


4. Tab VCI 3 serial No. that you want to connect.

The screenshot shows the 'Device Manager' app interface, similar to the previous one. The 'Wireless connection setup' section now shows a table with one row of data. A hand icon is shown tapping the 'VCI_III_VBW' entry in the 'VCI(Wireless)' column. The 'State' column for this entry shows 'Found'. The 'Search' button has been replaced by a blue circular refresh icon and a 'Stop' button.


VCI(Wireless)	State
VCI_III_VBW	Found

3. How to perform VCI 3 Firmware update

5. Tab "Pair".

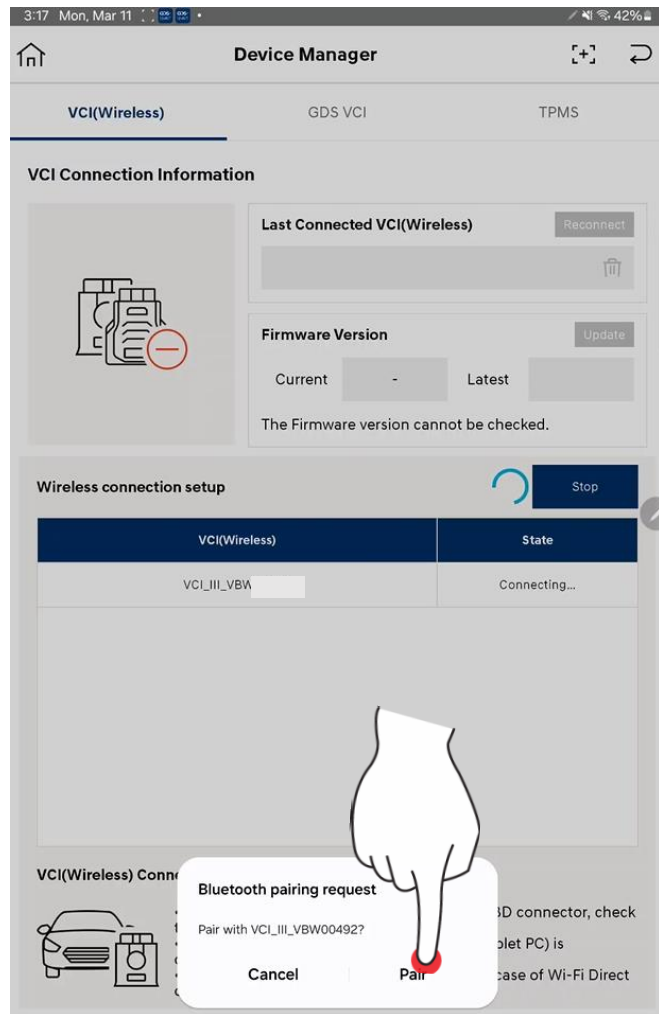

6. Tab "Update".

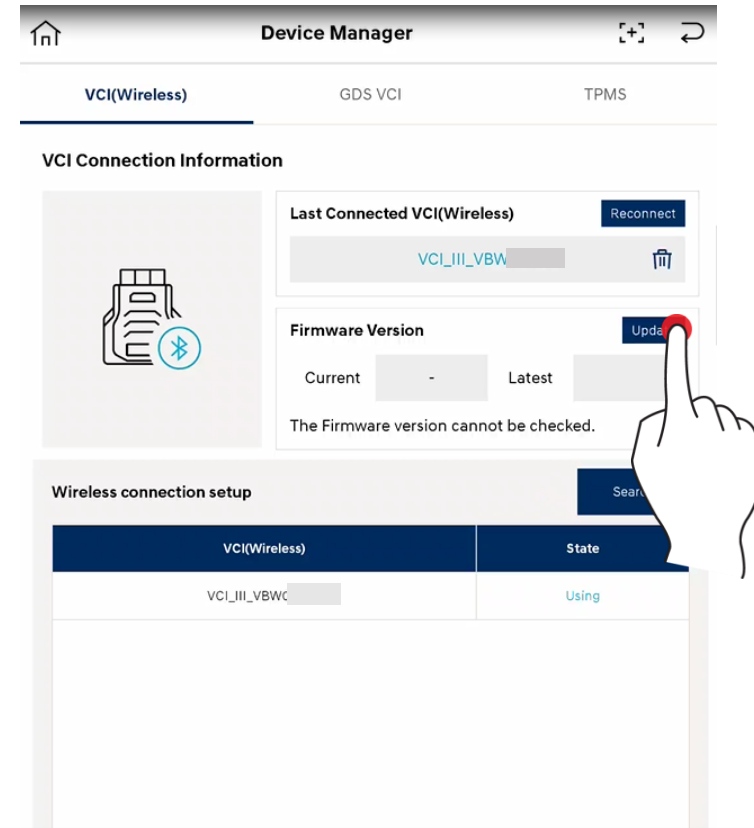

Notice.
If you find VCI_III_VCI12345 on the list, wait for at least 1 minutes and reconnect it. You will find correct serial no. of it.